



Laserliner

LaserRange-Master i2



Laser distance meter – Simple operating techniques

Rev19W01

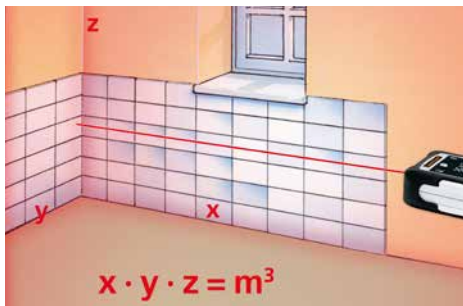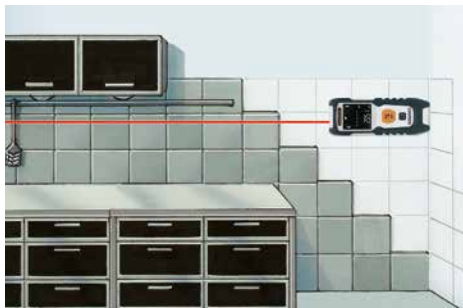

- **Point-precise measuring with laser** to determine lengths exactly
- **The area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
- **Measuring accuracy** up to 20 m: ± 2 mm*
- **Inside measurement range: 0,3 m to 20 m**
- **2 selectable measurement reference points:** front and rear
- **Min/Max function** to determine diagonals, verticals and horizontals
- **Illuminated 2-line VTN display**
- **Small, compact design** – fits in any toolbox
- **Sturdy, ergonomically designed, rubberised casing**

TECHNICAL DATA

ACCURACY ± 2 mm (typical)*
MEASUREMENT RANGE max. 20 m
MINIMAL RANGE 0,3 m
LASER Class 2 < 1mW
LASER WAVELENGTH 650 nm
OPERATING TEMPERATURE -10°C ... 40°C
STORAGE TEMPERATURE -20°C ... 70°C
UNIT m
AUTOMATIC SWITCH-OFF 30 sec laser / 3 min device
FUNCTIONS distances, areas, volumes, min/max/duration measurement
POWER SUPPLY Batteries 2 x 1,5 V type AAA
DIMENSIONS (W x H x D) 40 x 110 x 24 mm
WEIGHT with batteries 90 g

* See operating instructions for specific accuracies



Illuminated VTN display



Small, compact design



Protective rubber casing



LaserRange-Master i2

inclusive softbag
+ batteries (2 x 1,5 V type AAA)

Packaging dimension (W x H x D)
113 x 236 x 64 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master i2	080.829A	4 021563 702824	5

