


Laserliner

PowerCross-Laser 5 Combi



Cross-line laser
with green laser cross,
3 red laser lines and plumb laser

Rev18W49

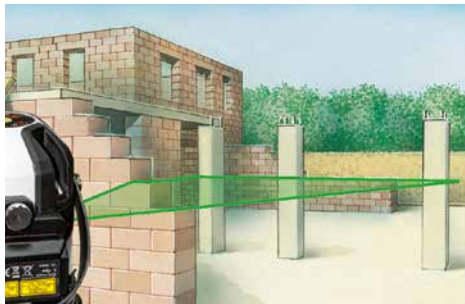

Stable metal base with vernier adjustment




Lithium battery pack

- **Green laser technology**
- Extremely bright green laser cross at front in the **DLD design achieves high-quality lines** as well as a clean and clear and therefore easily visible line image.
- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- The **4 vertical lines** are aligned at right angles to one another.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Connectible** laser lines.
- **RX-/GRX-Ready:** Together with an optional laser receiver, the integrated hand-held receiver modes permit detection of the red laser lines (RX-Ready) and green laser lines (GRX-Ready) over long distances and under unfavourable light conditions.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- Long-lasting, powerful **rechargeable lithium-ion battery**.
- **Transport lock:** A pendulum lock protects unit during transport.

TECHNICAL DATA

ACCURACY ± 0,2 mm / m
SELF-LEVELLING RANGE ± 2°
LEVELLING automatic
LASER WAVELENGTH line lasers red 635 nm line lasers green 515 nm plumb laser red 650 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY rechargeable lithium-ion battery, approx. 4 hrs operating time
OPERATING CONDITIONS 0...50°C, humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS -10...70°C, max. humidity 80% rH
WEIGHT 1.4 kg
DIMENSIONS (W x H x D) 120 x 120 x 200 mm

1H 4V 1D

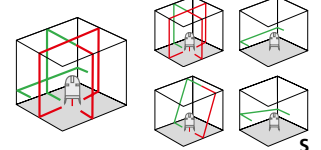

PowerCross-Laser 5 Combi

- including L-BOXX 136
- + tripod adapter
- + power supply/battery charger
- + rubber caps
- + rechargeable lithium-ion battery

Packing dimension (W x H x D)
442 x 151 x 357 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
PowerCross-Laser 5 Combi	057.300L	4 021563 707010	1

